


NorCook IV N7503 BK

Cod. 4115

EAN 8435025741157

4115_NorCook IV N7503 BK

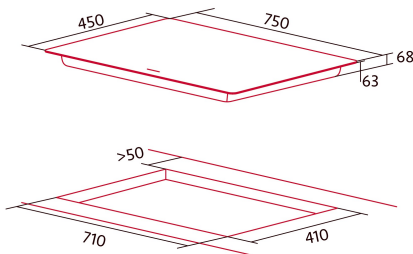

GENERAL INFORMATION

EAN/UPC	8435025741157
Subfamily	Mixed

Product sheet

Number of cooking zones	3
Zone 1: Technology	Radiant
Zone 1: Type of zone	Triple
Zone 1: Position	Left
Zone 1: Zone diameter (mm)	27
Zone 1: Power (kW)	2,7
Zone 1: Consumption (Wh / kg)	140,1
Zone 1B: Zone diameter (mm)	21
Zone 1B: Power (kW)	1,95
Zone 1C: Zone diameter (mm)	14,5
Zone 1C: Power (kW)	1,05
Zone 2: Technology	Induction
Zone 2: Type of zone	Simple
Zone 2: Position	Rear Centre
Zone 2: Zone diameter (mm)	18
Zone 2: Power (kW)	1,4
Zone 2: Consumption (Wh / kg)	184,9
Zone 2B: Zone diameter (mm)	N/A
Zone 2C: Zone diameter (mm)	N/A
Zone 3: Technology	Induction
Zone 3: Type of zone	Simple
Zone 3: Position	Front Right
Zone 3: Zone diameter (mm)	22
Zone 3: Power (kW)	2,3
Zone 3: Booster (kW)	3
Zone 3: Consumption (Wh / kg)	176,3
Zone 3B: Zone diameter (mm)	N/A
Zone 3C: Zone diameter (mm)	N/A
Zone 4: Technology	N/A
Zone 4: Type of zone	N/A
Zone 4: Position	N/A
Zone 4: Zone diameter (mm)	N/A
Zone 4B: Zone diameter (mm)	N/A
Zone 4C: Zone diameter (mm)	N/A
Zone 5: Technology	N/A
Zone 5: Type of zone	N/A
Zone 5: Position	N/A
Zone 5: Zone diameter (mm)	N/A
Zone 5B: Zone diameter (mm)	N/A
Zone 5C: Zone diameter (mm)	N/A
Zone 6: Technology	N/A
Zone 6: Type of zone	N/A
Zone 6: Position	N/A
Zone 6: Zone diameter (mm)	N/A
Zone 6B: Zone diameter (mm)	N/A
Zone 6C: Zone diameter (mm)	N/A

Dimensions

Width (mm)	750
Height (mm)	68
Depth (mm)	450
Built-in width (mm)	710
Built-in depth (mm)	410
Easy installation system	Quick Fix

Finishing

Material	Glass
Bevel	Front
Frame	No
Cooking supports	N/A

Control

Control type	Slider Touch Control
Control position	Front Centre
Independent zone control	-
Hidden control	-
Power levels	9 + Booster
Knob type	N/A
Cooking time programming	√
Countdown alarm	√
Power management	-
Connectivity	No
Autoignition	N/A

Safety

Safety lock	√
Child lock	Yes (Key)
Residual heat indicator	√
Automatic cookware detection	√
Smart cookware detection	-
Automatic safety shutdown	√
Liquid spill detection	√
Safety valve	-

Electrical connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	6,4
Electric shock protection	Class I
Power cord length (m)	1
Plug type	No plug

Accessories

Barbecue grill	No
----------------	----