




NorCook IS N8426 BK

Cod. 4162

EAN 8435025741621

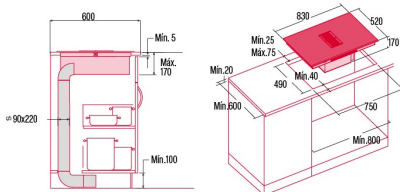

GENERAL INFORMATION

EAN/UPC	8435025741621
Subfamily	Flow-in

Product sheet

Number of cooking zones	4
Zone 1: Technology	Induction
Zone 1: Type of zone	Rectangular Flexible
Zone 1: Position	Front Right
Zone 1: Zone diameter (mm)	21
Zone 1: Power (kW)	2,2
Zone 1: Booster (kW)	3
Zone 1: Consumption (Wh / kg)	190,8
Zone 2: Technology	Induction
Zone 2: Type of zone	Rectangular Flexible
Zone 2: Position	Rear Right
Zone 2: Zone diameter (mm)	21
Zone 2: Power (kW)	2,2
Zone 2: Booster (kW)	2,6
Zone 2: Consumption (Wh / kg)	190,8
Zone 3: Technology	Induction
Zone 3: Type of zone	Rectangular Flexible
Zone 3: Position	Front Left
Zone 3: Zone diameter (mm)	21
Zone 3: Power (kW)	2,2
Zone 3: Booster (kW)	3
Zone 3: Consumption (Wh / kg)	190,8
Zone 4: Technology	Induction
Zone 4: Type of zone	Rectangular Flexible
Zone 4: Position	Rear Left
Zone 4: Zone diameter (mm)	21
Zone 4: Power (kW)	2,2
Zone 4: Booster (kW)	2,6
Zone 4: Consumption (Wh / kg)	190,8

Dimensions

Width (mm)	830
Height (mm)	170
Depth (mm)	520
Built-in width (mm)	750
Built-in depth (mm)	490

Finishing

Material	Glass
Bevel	Front

Control

Control type	Mono Slider
Control position	Front Centre
Independent zone control	√
Hidden control	√
Power levels	9 + Booster
Cooking time programming	√
Countdown alarm	√
Power management	√

Safety

Safety lock	√
Residual heat indicator	√
Automatic cookware detection	√
Smart cookware detection	√
Automatic safety shutdown	√
Liquid spill detection	√

Electrical connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	169,7
Electric shock protection	Class I
Plug type	No plug

