NODOR


INTEGRATED **HOODS**



NorBreeze BISE 900 SS

Cod. **8353** EAN **8435025783539**



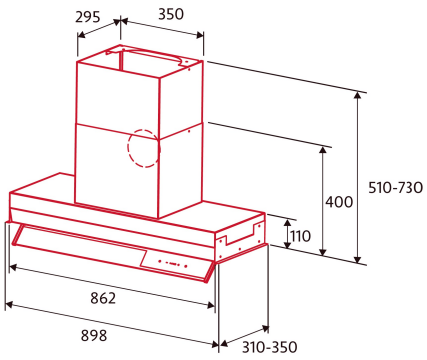

GENERAL INFORMATION

EAN/UPC	8435025783539
Subfamily	Integrated

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	42,9
EEI class (energy efficiency class)	A
FDE (fluid dynamic efficiency)	34,5
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (lux/W)	28,7
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	91,8
GFE class (grease filtering efficiency class)	B
Airflow in normal mode MIN (m3/h)	265
Airflow in normal mode MAX (m3/h)	610
Airflow in boost mode MIN (m3/h)	735
Acoustic power in normal mode MIN (dB)	44
Acoustic power in normal mode MAX (dB)	63
Acoustic power boost mode (dB)	71
Po (energy consumption in off mode) (W)	0
Ps (energy consumption in standby mode) (W)	0,49

Integration directive EU 66/2014

f (time increase factor)	0,8
EEI (Energy Efficiency Index)	47
QBEP (maximum efficiency at air flow point) (m3/h)	346,5
PBEP (maximum efficiency at pressure point) (Pa)	474
WBEP (power consumption at maximum efficiency) (W)	132
WL (nominal power lighting system) (W)	6
EMIDDLE (Average illuminance on the cooking surface) (lux)	172

External Dimensions

Width (mm)	862
Depth (mm)	310
Maximum total height (mm)	730
Minimum total height (mm)	510
Diamètre de sortie (mm)	150

Characteristics

Motor quantity	1
Maximum pressure (Pa)	541
Control technology	Electronic Touch Control
Booster	√
Power levels	4
Timer	√
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	No
Remote control	-

Lighting

Ray technology	LED

Installation

Minimum distance to electric plate (mm)	650
Minimum distance to gas plate (mm)	650
Charcoal filter	-
Back draught shutter	Included

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Electric shock protection	Class II
Plug type	Type F

Accessories

Upper decorative duct extension	STANDARD CIMNEYS IN THE PRODUCT
Back draught shutter	STANDARD IN THE MOTOR
Activated charcoal filter	N°2 HP8 (384x193,4x9,5)