




FILTER GROUPS



NorBreeze CUDO 520 SS

Cod. 8356

EAN 8435025783560

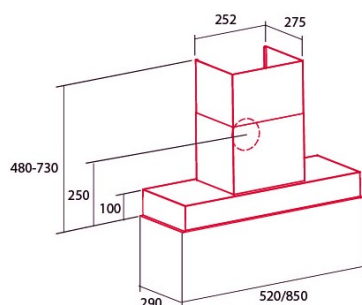

GENERAL INFORMATION

EAN/UPC	8435025783560
Subfamily	Insert

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	37,7
EI class (energy efficiency class)	A+
FDE (fluid dynamic efficiency)	35,1
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (lux/W)	28,7
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	97,8
GFE class (grease filtering efficiency class)	A
Airflow in normal mode MIN (m3/h)	240
Airflow in normal mode MAX (m3/h)	425
Airflow in boost mode MIN (m3/h)	725
Acoustic power in normal mode MIN (dB)	60
Acoustic power in normal mode MAX (dB)	63
Acoustic power boost mode (dB)	69
Po (energy consumption in off mode) (W)	0
Ps (energy consumption in standby mode) (W)	0,49

Integration directive EU 66/2014

f (time increase factor)	0,7
EI (Energy Efficiency Index)	41,7
QBEP (maximum efficiency at air flow point) (m3/h)	356,4
PBEP (maximum efficiency at pressure point) (Pa)	463
WBEP (power consumption at maximum efficiency) (W)	130,5
WL (nominal power lighting system) (W)	6
EMIDDLE (Average illuminance on the cooking surface) (lux)	172

External Dimensions

Width (mm)	506
Depth (mm)	265
Diamètre de sortie (mm)	150

Characteristics

Motor quantity	1
Maximum pressure (Pa)	510
Control technology	Mechanical push button
Booster	√
Power levels	4
Timer	√
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	√
Connectivity	No
Remote control	-
Display	-

Lighting

Ray technology	LED
----------------	-----

Installation

Back draught shutter	Included
----------------------	----------

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Electric shock protection	Class II
Plug type	Type F

Accessories

Upper decorative duct extension	STANDARD CIMNEYS IN THE PRODUCT
Back draught shutter	STANDARD IN THE MOTOR
Activated charcoal filter	N°1 KF30 (435X192X9)

