




DECORATIVE CEILING




NorBreeze ISLA DEIMOS 1400 TWIN RF

Cod. 8525

EAN 8435025785250

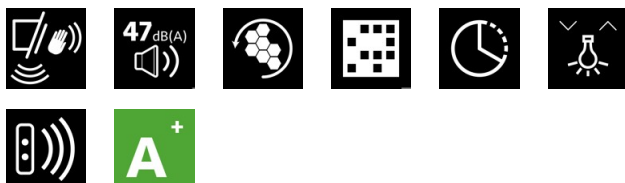

8525_NorBreeze ISLA DEIMOS 1400 TWIN RF

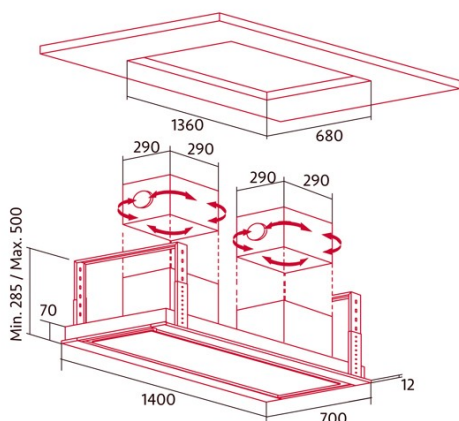

GENERAL INFORMATION

EAN/UPC	8435025785250
Subfamily	Ceiling

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	44
EI class (energy efficiency class)	AP
FDE (fluid dynamic efficiency)	39,3
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (lux/W)	16,7
LE class (light efficiency class)	D
GFE (grease filtering efficiency)	58,6
GFE class (grease filtering efficiency class)	E
Airflow in normal mode MIN (m3/h)	400
Airflow in normal mode MAX (m3/h)	645
Airflow in boost mode MIN (m3/h)	1600
Acoustic power in normal mode MIN (dB)	47
Acoustic power in normal mode MAX (dB)	66
Acoustic power boost mode (dB)	77
Po (energy consumption in off mode) (W)	0,46
Ps (energy consumption in standby mode) (W)	0

Integration directive EU 66/2014

f (time increase factor)	0,6
EI (Energy Efficiency Index)	39,8
QBEP (maximum efficiency at air flow point) (m3/h)	738,8
PBEP (maximum efficiency at pressure point) (Pa)	308
WBEP (power consumption at maximum efficiency) (W)	161
WL (nominal power lighting system) (W)	12
EMIDDLE (Average illuminance on the cooking surface) (lux)	200

External Dimensions

Width (mm)	1400
Depth (mm)	700
Maximum total height (mm)	500
Minimum total height (mm)	285
Diamètre de sortie (mm)	150

Characteristics

Motor quantity	2
Motor model	BT4DC
Maximum pressure (Pa)	310
Filter technology	Aluminium mesh
Control technology	Electronic Touch Control
Booster	✓
Power levels	6
Timer	✓
Filter saturation indicator	✓
Charcoal filter replacement indicator	-
Dimmer function	✓
Connectivity	✓
Remote control	✓
Display	Display_grafico

Lighting

Light model	SSLED BICOLOR
Ray technology	LED

Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	700
Recirculation option	✓
Charcoal filter	-
Back draught shutter	Included
Inner shield	-

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	282
Electric shock protection	Class I

Accessories

Upper decorative duct extension	No
White decorative duct	No
Black decorative duct	No
Island tube booster	No
MAX PRO Metal filter	No
Activated charcoal filter	02859399
Noiseless flexible duct	2 x 02893002
Recirculation kit	No