





DECORATIVE VERTICAL

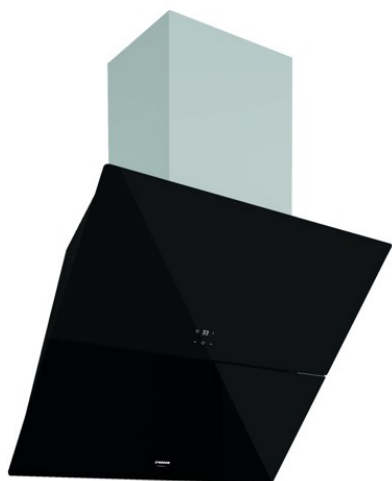

NorBreeze MISTRAL 70 DB

Cod. 8604

EAN 8435025786042



GENERAL INFORMATION

EAN/UPC	8435025786042
Subfamily	Angle Glass

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	224
EI class (energy efficiency class)	A++
FDE (fluid dynamic efficiency)	367
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (lux/W)	234
LE class (light efficiency class)	B
GFE (grease filtering efficiency)	755
GFE class (grease filtering efficiency class)	C
Airflow in normal mode MIN (m3/h)	2553
Airflow in normal mode MAX (m3/h)	2553
Airflow in boost mode MIN (m3/h)	800
Acoustic power in normal mode MIN (dB)	46
Acoustic power in normal mode MAX (dB)	64
Acoustic power boost mode (dB)	69
Po (energy consumption in off mode) (W)	0,49
Ps (energy consumption in standby mode) (W)	0

Integration directive EU 66/2014

f (time increase factor)	0,7
EI (Energy Efficiency Index)	353
QBEP (maximum efficiency at air flow point) (m3/h)	3987
PBEP (maximum efficiency at pressure point) (Pa)	290
WBEP (power consumption at maximum efficiency) (W)	876
WL (nominal power lighting system) (W)	5
EMIDDLE (Average illuminance on the cooking surface) (lux)	117

External Dimensions

Width (mm)	695
Depth (mm)	403
Maximum total height (mm)	1196
Minimum total height (mm)	856
Diamètre de sortie (mm)	150

Characteristics

Motor quantity	1
Motor model	BT4DC
Maximum pressure (Pa)	357
Filter technology	Aluminium mesh
Control technology	Electronic Touch Control
Booster	√
Power levels	6
Timer	√
Filter saturation indicator	√
Charcoal filter replacement indicator	√
Dimmer function	√
Connectivity	√
Remote control	-
Display	Display_grafico

Lighting

Light model	SSLED BICOLOR
Ray technology	LED

Installation

Minimum distance to electric plate (mm)	400
Minimum distance to gas plate (mm)	650
Recirculation option	√
Charcoal filter	√
Back draught shutter	Included
Inner shield	-

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	140
Electric shock protection	Class I
Plug type	No plug

Accessories

Upper decorative duct extension	No
White decorative duct	No
Black decorative duct	No
Island tube booster	No
Back draught shutter	2832008
MAX PRO Metal filter	No
Activated charcoal filter	2859399
Noiseless flexible duct	2893002
Recirculation kit	No